

**Applicable sockets:**

SO-1066-001  
SM-1002-003

**Application Notes:**

001  
002  
103A  
007  
023

• All welded construction

• Contact arrangement

4 PDT

• Qualified to

MIL-PRF-83536 /5 & /6

### PRINCIPLE TECHNICAL CHARACTERISTICS

• <b>Contacts rated at</b>	Low level, 28 Vdc and 115/200 Vac, 400Hz, 3Ø, case grounded
• <b>Weight</b>	0.058 lbs. max
• <b>Dimensions</b>	0.81 in x 0.81 in x 0.64 in
• <b>Special models available upon request</b>	
• <b>Hermetically sealed, corrosion resistant metal can</b>	

### CONTACT ELECTRICAL CHARACTERISTICS

Contact rating per pole and load type [1]	Load current in Amps		
	28 Vdc	115 Vac, 400 Hz, 1Ø	115/200 Vac, 400 Hz, 3Ø
Resistive	5	5	5
Inductive [2]	3	5	5
Motor	2	3	3
Lamp	1	1	-
Overload	20	30	30
Rupture	25	40	40
Low level [3]	-	-	-
Time current characteristics [4]	-	-	-

## COIL CHARACTERISTICS (Vdc)

CODE	A	B	C	M	N [5]	R [5]	V [5]
Nominal operating voltage	28	12	6	48	28	12	6
Maximum operating voltage	29	14.5	7.3	50	29	14.5	7.3
Maximum pickup voltage							
- Cold coil at +125° C	18	9	4.5	36	18	9	4.5
- During high temp test at +125° C	19.8	9.9	5	38	19.8	9.9	5
- During continuous current test at +125° C	22.5	11.25	5.7	42	22.5	11.25	5.7
Maximum drop-out voltage	7	4.5	2.5	14	7	4.5	2.5
Coil resistance in $\Omega$ $\pm 10\%$ at +25° C except types "C" and "V" +20%, - 10% $\pm 20\%$	400	100	25	1275	400	100	25


## GENERAL CHARACTERISTICS

Temperature range	-70°C to +125°C
Minimum operating cycles (life) at rated load	100,000
Minimum operating cycles (life) at 25% rated load	400,000
Dielectric strength at sea level	
- All circuits to ground and circuit to circuit	1000 Vrms
- Coil to ground	1000 Vrms
Dielectric strength at altitude 80,000 ft	500 Vrms [6]
Insulation resistance	
- Initial (500 Vdc)	100 M $\Omega$ min
- After environmental tests (500 Vdc)	50 M $\Omega$ min
Sinusoidal vibration (A, and D mounting)	0.12 d.a. / 10 to 70 Hz 30G / 70 to 3000 Hz
Sinusoidal vibration (E mounting in track)	0.06 d.a. / 10 to 57 Hz 10G / 57 to 500 Hz 20G / 500 to 3000 Hz
Sinusoidal vibration (G and J mounting)	0.12 d.a. / 10 to 57 Hz 20G / 57 to 3000 Hz
Random vibration	
- Applicable specification	MIL-STD-202
- Method	214
- Test condition – A, and D mounting	1G (0.4G <sup>2</sup> /Hz, 50 to 2000 Hz)
- Test condition – E, J, and G mounting (E in track)	1E (0.2G <sup>2</sup> /Hz, 50 to 2000 Hz)
- Duration	15 minutes each plane
Shock (A, D, and J mounting)	200G / 6 ms
Shock (E mounting in track)	50G / 11 ms
Shock (G and J mounting)	100G / 6 ms
Maximum contact opening time under vibration and shock	10 $\mu$ s
Operate time at nominal voltage @ 25°C	6 ms max
Release time at nominal voltage @ 25°C	6 ms max
Contact make bounce at nominal voltage @ 25°C	0.5 ms max
Contact release break bounce at nominal voltage @ 25°C	0.1 ms max [7]
Weight, maximum	0.058 lbs.


Unless otherwise noted, the specified temperature range applies to all relay characteristics.

Dimensions in inches  
Tolerances, unless otherwise specified, XX ± 0.03 in., XXX ± 0.010


## MOUNTING STYLES




MOUNTING STYLE A

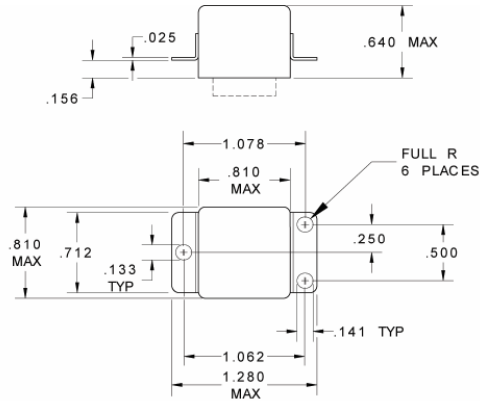

MOUNTING STYLE D

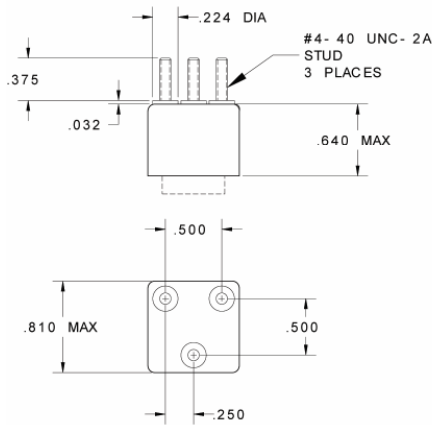


MOUNTING STYLE G

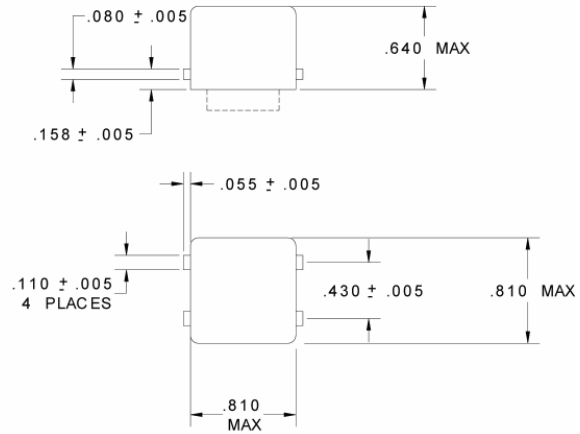

MOUNTING STYLE E


NOTE:  
FOR USE WITH TRACK MOUNT  
SYSTEM, MT- 3000- .003 &  
SM- 1002- 003.  
SILICONE RUBBER GASKET NOT  
PROVIDED ON THIS MOUNTING  
STYLE.

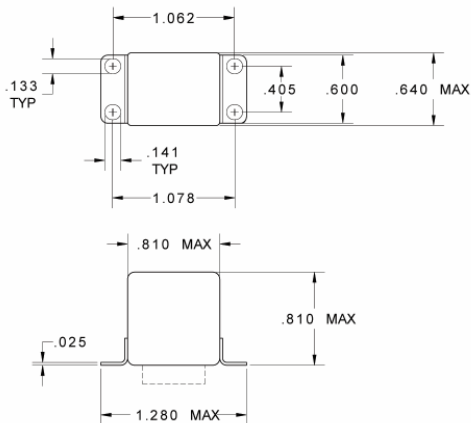

MOUNTING STYLE J

Dimensions in inches  
Tolerances, unless otherwise specified, XX ± 0.03 in., XXX ± 0.010


## TERMINAL TYPES

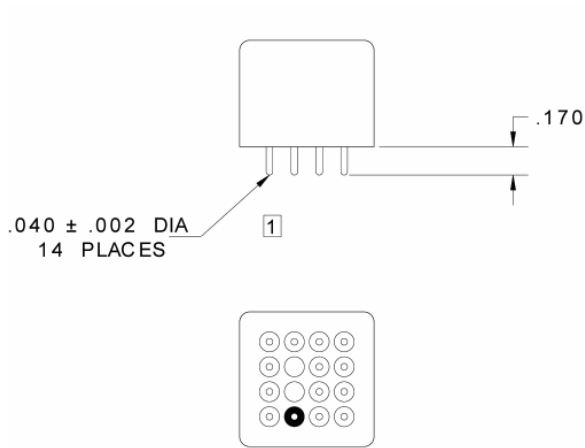

1 INSULATOR P/ N RC- RP8000050- 1 AVAILABLE FROM ROBISON ELECTRONICS, SAN LUIS OBISPO, CA.


### TERMINAL TYPE 1

FINISH:  
BODY- TIN/ LEAD  
TERMINALS- TIN/ LEAD

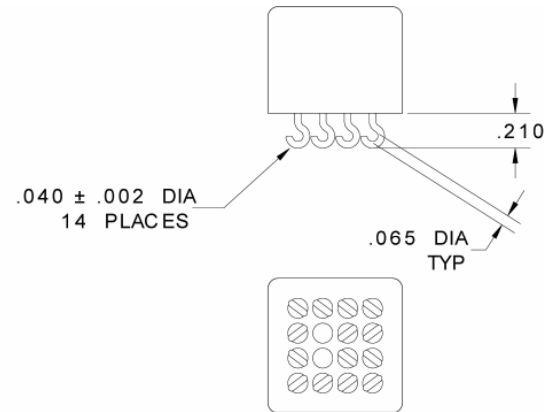

### TERMINAL TYPE 2

FINISH:  
BODY- TIN/ LEAD  
TERMINALS- TIN/ LEAD

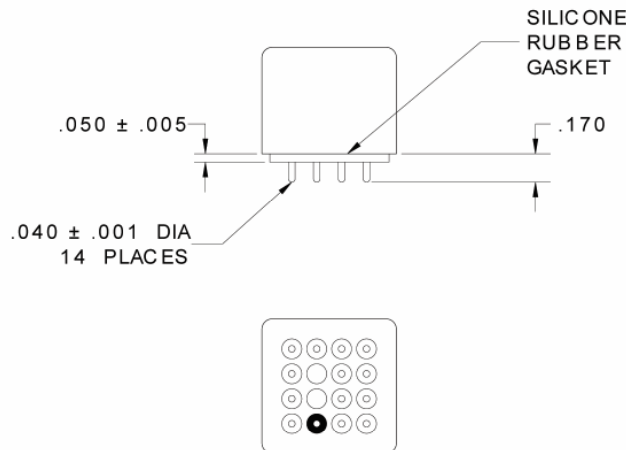


### TERMINAL TYPE 4

FINISH:  
BODY- TIN/ LEAD  
TERMINALS- GOLD PLATED


Dimensions in inches  
Tolerances, unless otherwise specified, XX ± 0.03 in., XXX ± 0.010

## DIAGRAMS


### SCHEMATIC DIAGRAM

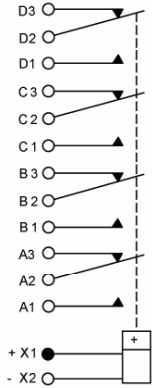

### WIRING DIAGRAM

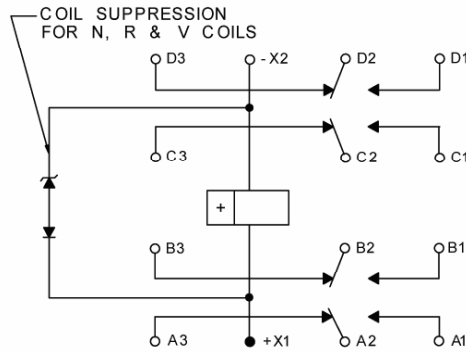


### STANDARD TERMINAL LAYOUT

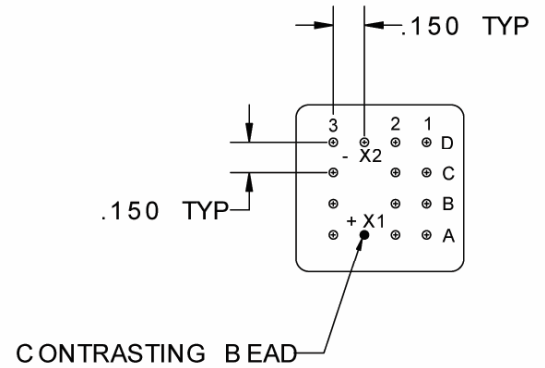

TOL: .XX ±.03; .XXX ±.010

## NUMBERING SYSTEM

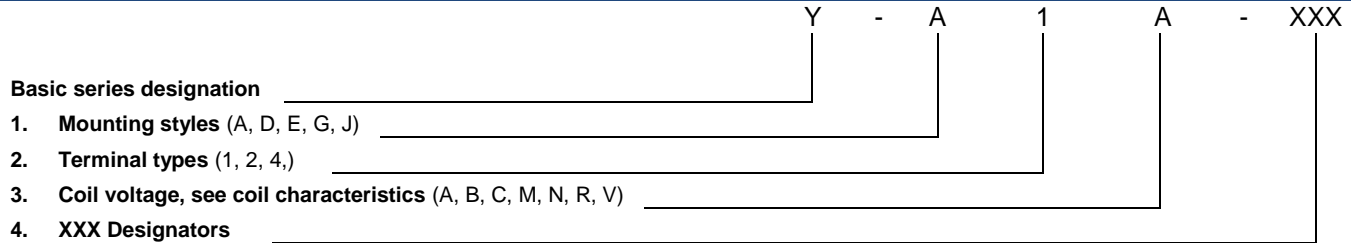

## NOTES

- Standard Intermediate Current test applicable; relay can also switch low level load while switching any of the other rated loads on adjacent contacts.
- Inductive load life: 20,000 cycles.
- Low level endurance test: contact load of 10 to 50 millivolt, 10 to 50 microamp, 100 Ohm max. contact resistance.
- Refer to MIL-PRF-83536 for details.
- "N" "R" & "V" coils have back EMF suppression to 42 volts maximum.
- 500 Vrms with silicone gasket compressed, 250 Vrms all other conditions.
- Applicable to Type "N", "R" & "V" coils only.
- Relay will not operate, but will not be damaged by application of reverse polarity on coil.
- Reference MIL-PRF-83536/5 & 6

For any inquiries, please contact your local sales representative: leachcorp.com